


PUBLIC ADDRESS / SPEAKERS / EXPONENTIALS

FE-149

LOW IMPEDANCE EXPONENTIAL SPEAKER

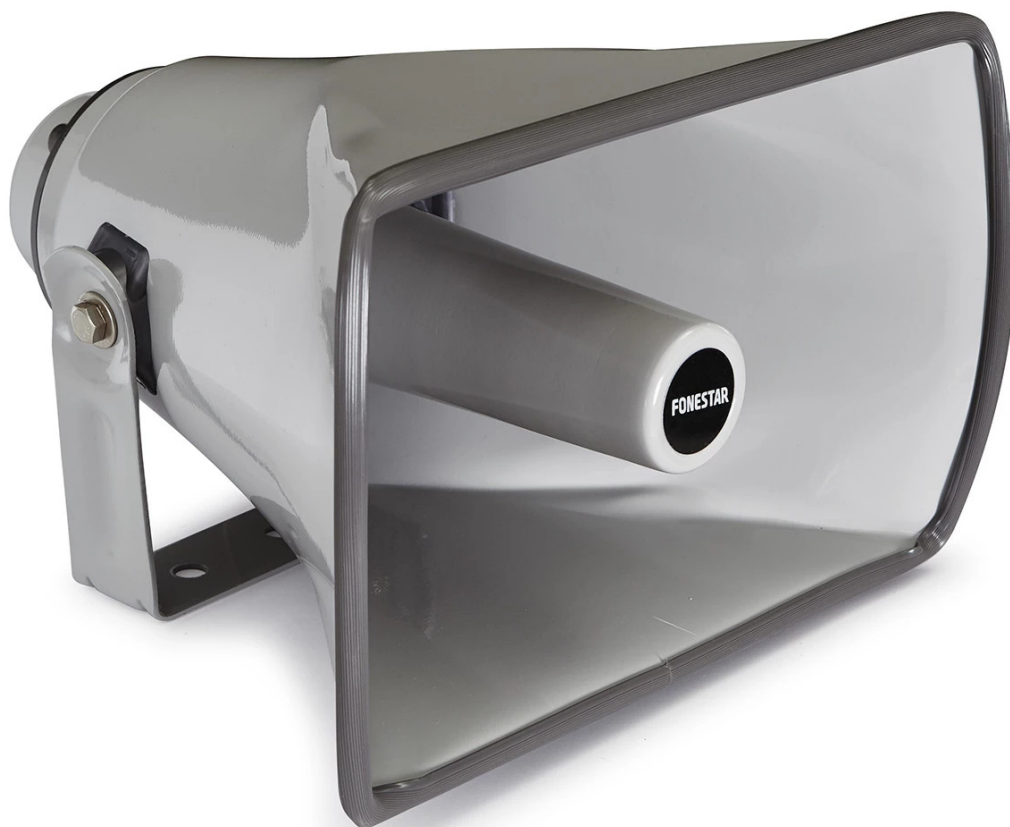

- ✓ Great sound for voice
- ✓ Large sound range
- ✓ Robust construction in light and strong aluminium
- ✓ Resistant in humid environments

ESPECIALLY RECOMMENDED IN:



Factories



Sports facilities



Education



All sectors

DESCRIPTION

Low impedance horn loudspeaker Robust, lightweight aluminium construction, perfect for indoor or outdoor PA installations. Excellent frequency response, for public address applications. Exponential diffuser, coverage angle of 130° H x 90° V and a sensitivity of 106 dB at 1 W/1 m, allowing long distances to be reached and large areas to be covered. Includes fixing mount for easy installation, minimizing assembly time. For low-impedance public address installations in cars, schools, sports facilities, industry, etc.

TECHNICAL CHARACTERISTICS

FEATURES	Low impedance horn speaker.
POWER	40 W maximum
RESPONSE	250-7,500 Hz
IMPEDANCE	8 Ohm
SENSITIVITY	106 dB at 1 W/1 m
DISPERSION	130° H x 90° V
MATERIAL	Aluminium
COLOUR	Grey
DIMENSIONS	35 x 23 x 33.5 cm depth
WEIGHT	2.1 kg