

SYSTEMS AND CONTROL / ZONE SYSTEMS / DIGITAL

# MPX-410ES

AUDIO INPUT/OUTPUT CONTROL



- ✔ Converts and transmits digital audio to the RD port
- ✔ 2 audio input and output channels
- ✔ Signal presence and saturation indicator lights for inputs and outputs

ESPECIALLY RECOMMENDED IN:



Sports facilities



Hotels






All sectors

## DESCRIPTION

The MPX-4088 system is a highly versatile audio matrix, perfect for installations of any size, allowing a multitude of configuration options, DSP signal processing and integrated solutions to common problems such as feedback, covering almost any installation need. The MPX-410ES is an audio input/output remote control for matrix mod. MPX-4088. It has 2 input channels and 2 output channels. RJ-45, Cat 5e cable system connection. For installations where there are various audio sources and audience areas such as shopping malls, hotels, conference rooms, stadiums, etc.

## TECHNICAL CHARACTERISTICS

FEATURES	<p>Audio input/output control for audio matrix mod. MPX-4088.</p> <p>2 input channels and 2 output channels.</p> <p>Converts and transmits digital audio to RD port.</p> <p>Signal presence and saturation LED indicators for the inputs and outputs.</p>
INPUTS	<p>1 balanced mic., XLR 5,100 Ohm, assignable to channels 10 or 12.</p> <p>1 stereo RCA line, 5,100 Ohm, 7.74 V, assignable to channels 9/10 or 11/12.</p> <p>1 RD port for connection to matrix MPX-4088, RJ-45</p>
OUTPUTS	<p>2 balanced line, euroblock 240 Ohm, 7.74 V, assignable to digital channels 9/10 or 11/12</p>
CONTROLS	<p>Microphone volume control</p> <p>Phantom power supply, selectable</p>
CONNECTION	<p>RJ-45, Cat 5e cable</p>
PHANTOM	<p>48 V</p>
POWER SUPPLY	<p>24 V DC, 100 mA, via RD port</p>
DIMENSIONS	<p>147 x 86 x 47 mm depth</p>
WEIGHT	<p>0.25 kg</p>
ACCESSORIES	<p>Surface box</p>

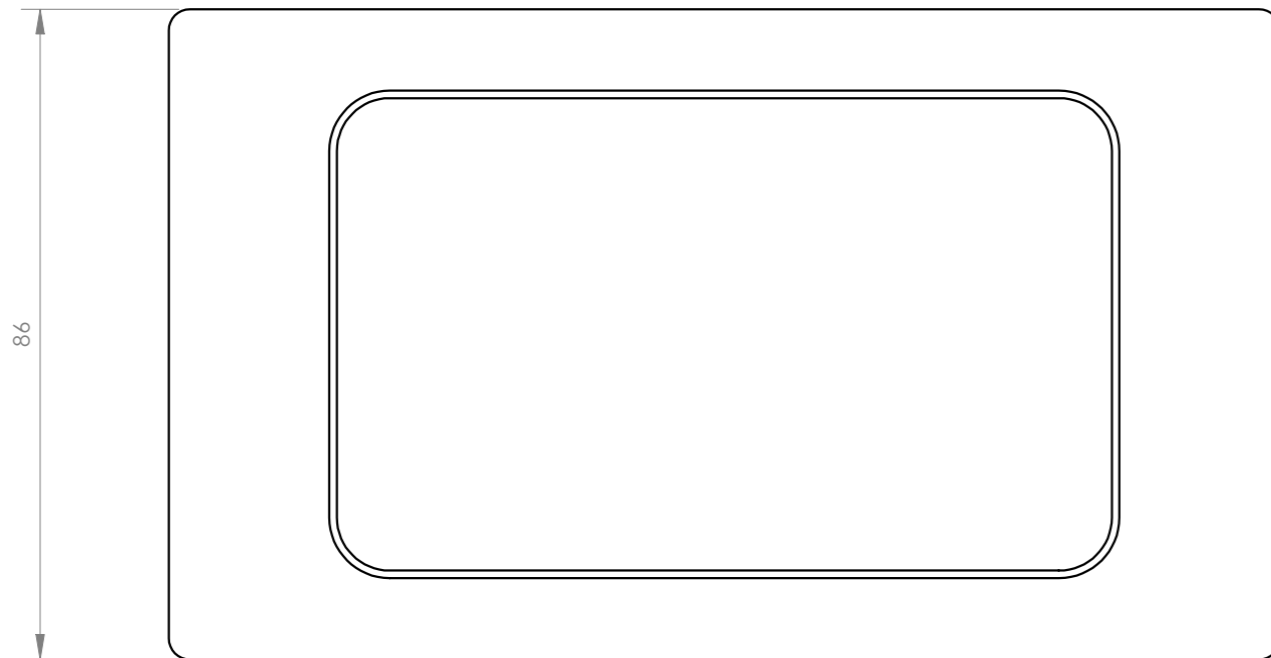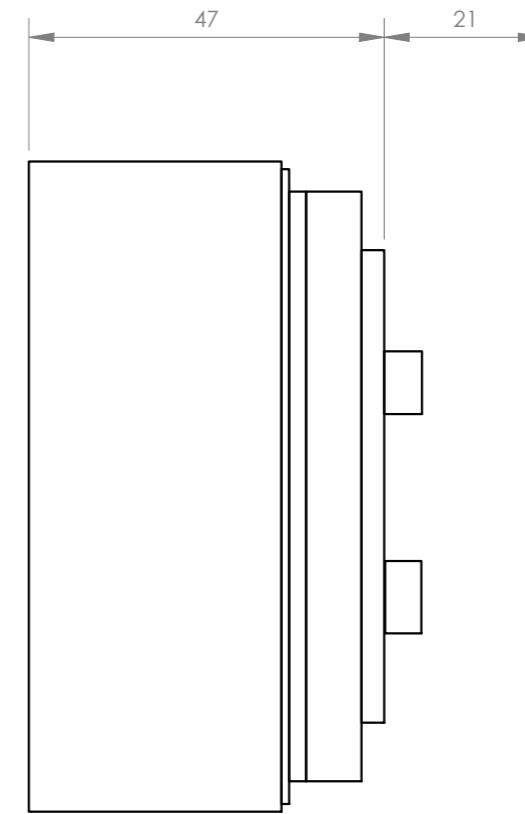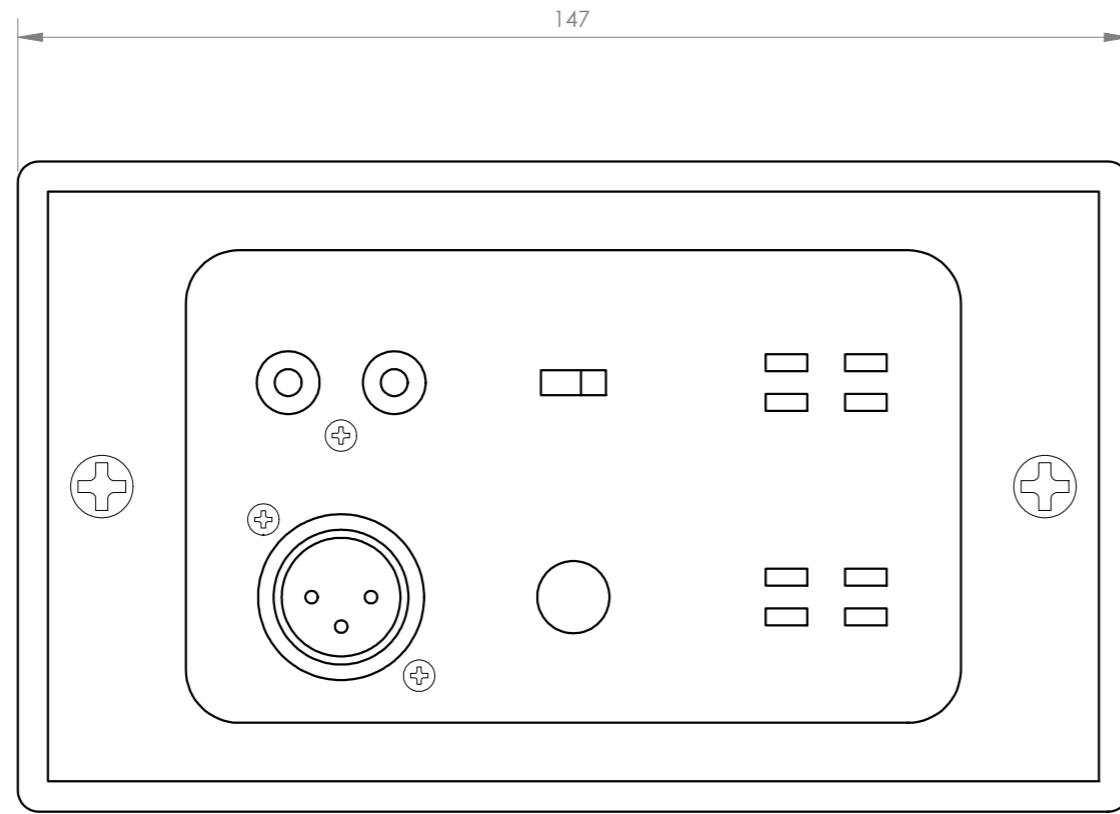

<b>FONESTAR</b>	Model	Description	Units	Scale
	MPX-410ES	AUDIO INPUT/OUTPUT CONTROL	mm	1:1