

PUBLIC ADDRESS / SPEAKERS / GARDEN

LAND-30TS

100 V LINE TRANSFORMER GARDEN SPEAKER



- ✓ Street furniture design
- ✓ High-strength materials, fibreglass, resins and anti-rust components
- ✓ Weatherproof with IP-66 protection rating
- ✓ Clear, high-quality 360° sound

ESPECIALLY RECOMMENDED IN:



Hospitality



Hotels



Transport Stations



All sectors

DESCRIPTION

Garden speaker, balance between durability and sound quality. It is specifically designed to provide an exceptional sound experience in outdoor environments. Street furniture design to blend in with the environment. Weatherproof with an IP-66 protection rating, to withstand adverse weather conditions, rain, sun or dusty environments. It is built with high quality materials, fibreglass, resins and rust resistant components. This combination of materials ensures exceptional resistance to impact, corrosion and wear, extending the product's service life. It delivers clear, high quality sound. The built-in crossover network distributes the sound between its speakers to reproduce a sound that covers the entire audio range. Its 360° sound surrounds the environment, distributing the sound evenly in all directions. The loudspeaker has a 100 V line transformer to be used in 100 V line distributed sound systems. This makes it easy to integrate into complex installations. These speakers are ideal for use in parks and gardens, outdoor tourist sites, theme parks, restaurants, bars and cafes with outdoor spaces, terraces or gardens. It provides pleasant background music and a cosy atmosphere. In addition, they can be used for higher quality music and to broadcast announcements or instructions in outdoor areas.


TECHNICAL CHARACTERISTICS

FEATURES	100 V line transformer garden speaker. Weatherproof. They are prepared for outdoor use, have protection against water and anti-corrosion materials.
POWER	30 W RMS
LOUDSPEAKERS	1 x 6" polypropylene woofer 1 x 3/4" tweeter
RESPONSE	95-20,000 Hz
IMPEDANCE	30 W RMS@100 V (333 Ohm) 15 W RMS@100 V (666 Ohm)
SENSITIVITY	82 dB @ 1 W/1 m
MAXIMUM SOUND PRESSURE	96 dB @ max. W/1 m
DISPERSION	H: 360°
PROTECTIONS	IP-66 in compliance with EN 60529
MATERIAL	Fibreglass and resins Aluminium grille Stainless steel mounts for floor anchorage 30 cm output cable

TEMPERATURE RANGE	Operation: -10°C ~ 50°C
HUMIDITY	<95%
COLOUR	Green
DIMENSIONS	265 mm Ø x 330 mm high.
WEIGHT	5.65 kg




SPL vs Frequency

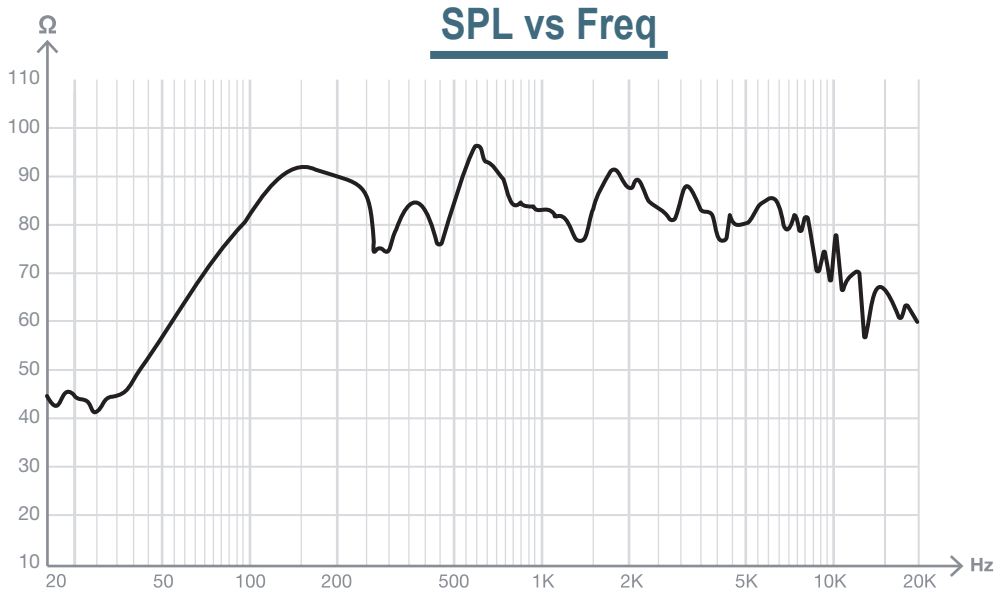

SPL vs Angle

dB SPL


100
95
90
85
80
75
70
65
60
55
50
45
40
35
30
25
20
15
10


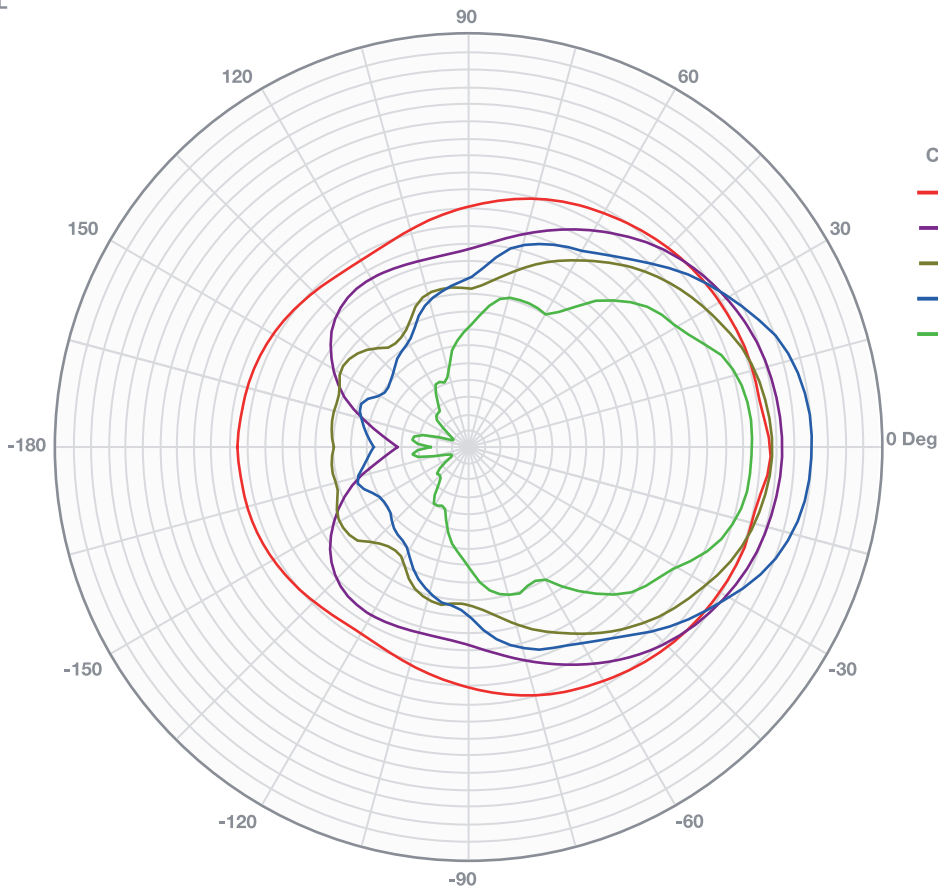


Curve	Freq	BW	Q	DI
—	500.00	156	2.3	3.6
—	1.00K	105	3.4	5.3
—	2.00K	84	4.3	6.3
—	4.00K	62	5.8	7.7
—	8.00K	65	5.5	7.4



● ↕ Impedance vs Frequency

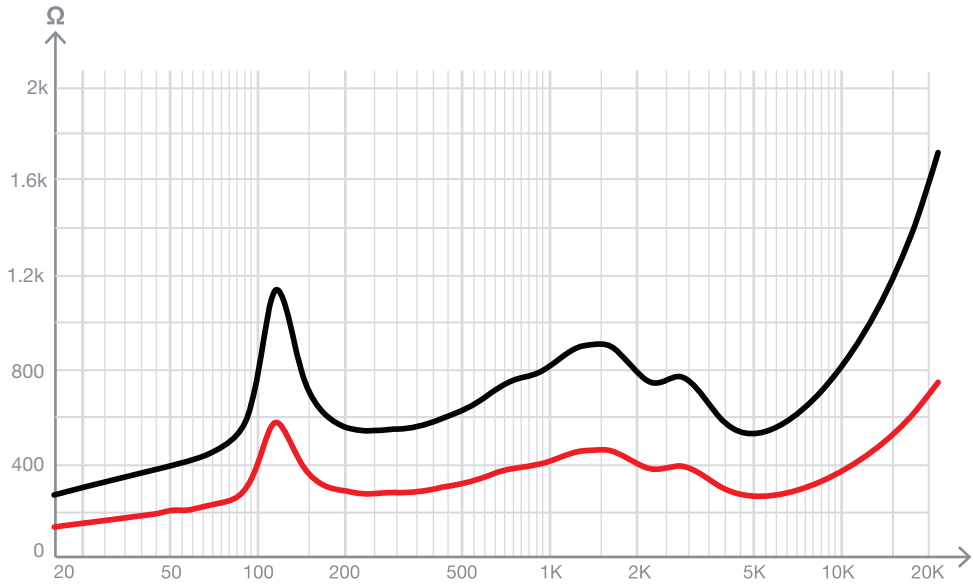

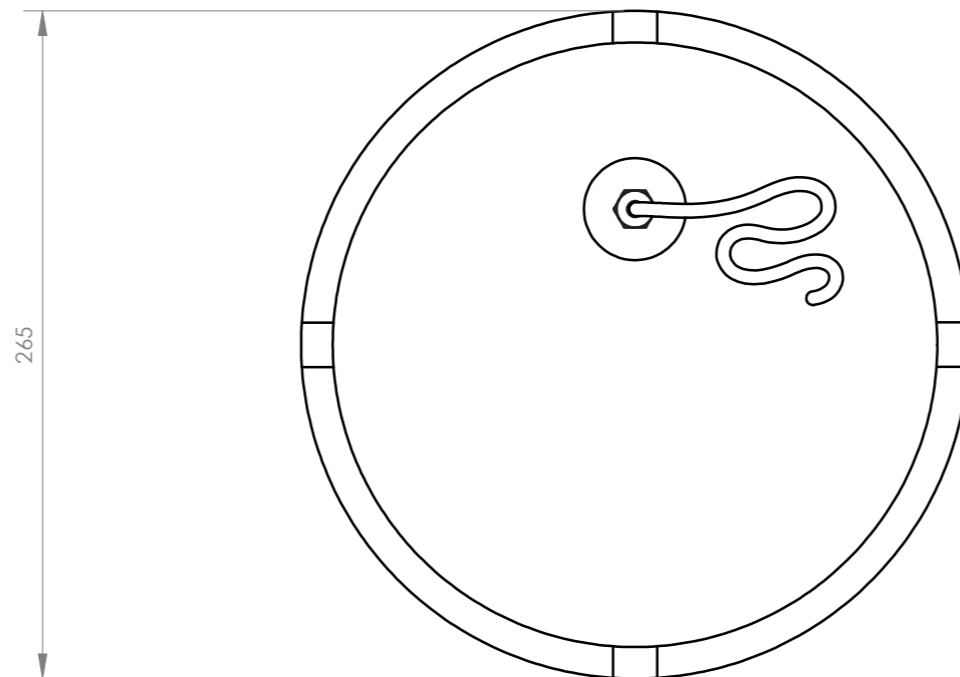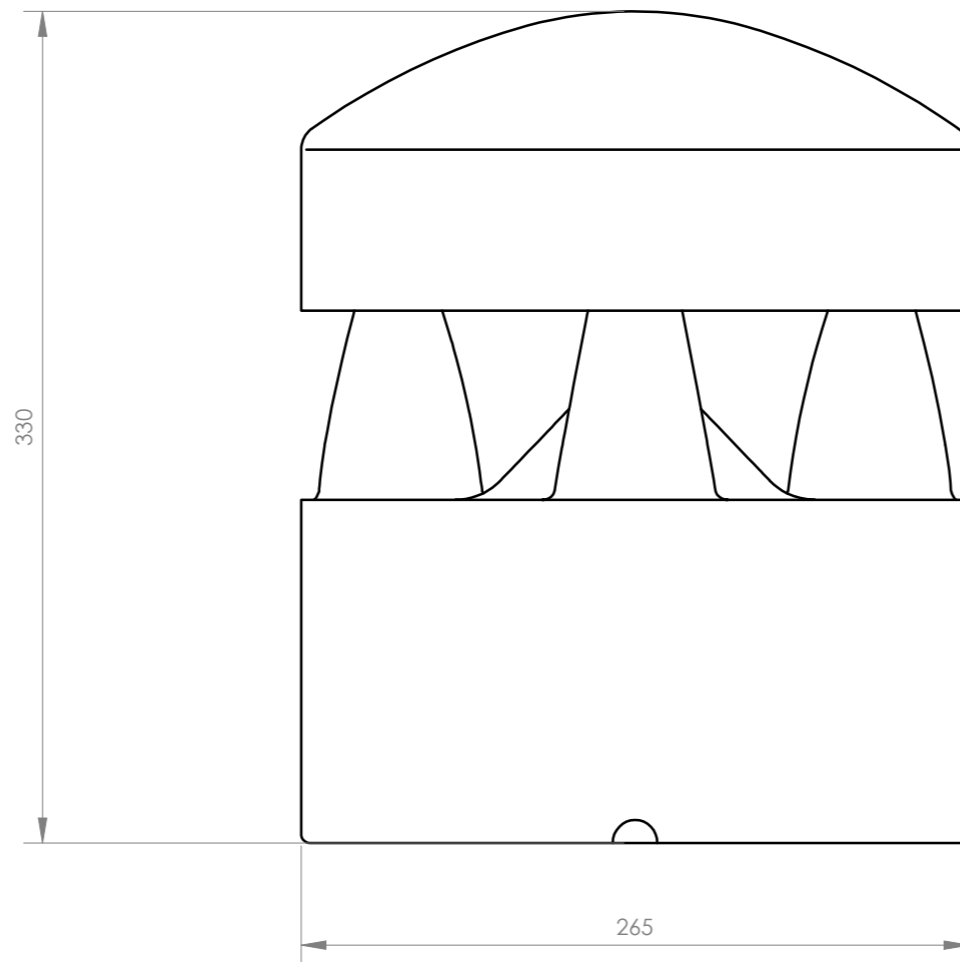

FONESTAR	Model	Description	Units	Scale
	LAND-30TS	100 V LINE TRANSFORMER GARDEN SPEAKER	mm	1:3