



SAV-4



SAV-6

DESCRIPTION

Loudspeaker mount with suction pads and adjustable safety strap, to install on the roof of a car, van etc. With holes for horn speaker mods. **FE-1210, FE-107, FE-149** or similar. Easy to mount and demount quickly on any type of vehicle.

WARNING**VERY IMPORTANT:**

- A) Before assembly, make sure that the suction pads are going to be on a flat surface without indents or marks that could let air in and therefore prevent them from sticking.
- B) Make sure that the surface **is clean and dry**. The installation of the mount on a dirty or damp surface, will practically cancel out the adhesive effect of the suction pads. Remove the silicone residue that polishes in car washes usually leave.

This mount is not suitable for canvas, vinyl, etc. which due to their porosity or movement, make it easy for air to get under the suction pads.

Dimensions: **SAV-4:** 31 x 5 x 31 cm depth

SAV-8: 66 x 5 x 18 cm depth

ATTENTION: Although this mount, with horn speakers assembled and correctly fixed, can stay perfectly in place at a maximum speed of 80 km/hour, it is recommended that you do not go faster than 50 km/hour to avoid damaging the mount, loudspeakers or even the vehicle. Especially when the wind is blowing strongly from the side or the front.


INSTALLATION

- 1.- Mount the loudspeakers on the corresponding bars on the mount using the nuts, bolts and washers supplied.
The connection has to be made in series or in parallel, depending on the impedance of the loudspeaker or amplifier to be connected.
- 2.- Position everything, loudspeakers-mount, on the roof of the vehicle. Take into consideration the warnings in part 2 (WARNING).
- 3.- Press the system down lightly so that the suction pads stick to the roof of the vehicle. Make sure that the surface is clean and do not apply any chemical product, adhesives, etc. to the suction pads or the installation surface.
- 4.- Pass the safety strap through the corresponding holes in the mount and then through the open door to the inside of the vehicle. Pass the free end through the strap tensioner and tighten pulling the free end.
- 5.- Check that everything is firmly attached in place and the doors close properly.
- 6.- Connect the loose end of the speaker cable to the amplifier output on the car passing it through the same open door.

Bear in mind that your vehicle will grow a few centimetres with the loudspeaker and mount on the roof. This could therefore knock into and damage things, for example garage doors, car washes, etc.

Make sure you remove it whenever you use something like this and in general when you are not using the PA system.

The materials used to manufacture this mount are weather-proof. However, in extreme heat, salty atmospheres, etc. some of the components could wear out more quickly, making it stick less effectively over a period of time. To avoid this, periodically check the state of the rubber, nuts, etc. and replace them with new ones if necessary.

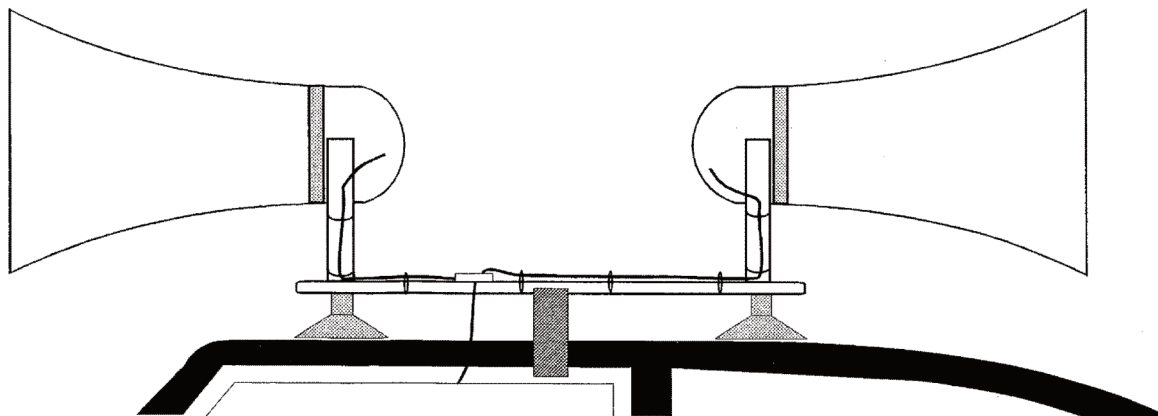

WARRANTY

This product has been tested and has passed the corresponding quality control prior to being put on the market.

FONESTAR guarantees the suitability of the product for its specified use during a period of 2 years from the delivery date and commits itself to repair or substitute the goods as expressed in the Spanish law 'La Ley General para la Defensa de los Consumidores y Usuarios, Real Decreto Legislativo 1/2007 16 Noviembre.

The lack of conformity in the first six months after purchase, due to a manufacturing defect, will be rectified with no more than showing the proof of purchase. After six months **FONESTAR** reserves the right to demand proof of the product being sold with that problem.

This warranty does not include damage produced by: inappropriate use or negligence, accidents, worn out parts due to use, breakages, burns, spilt liquids or other substances, excessive humidity, battery deterioration and internal manipulation of the device, the software or its components by unauthorized persons, and in general any use that is unrelated to the nature and purpose of the product.

If any service is needed during the warranty period because of lack of conformity, please contact the business or distributor where the product was purchased in no more than 2 months after being conscious of the problem. It is only necessary to contact **FONESTAR** if it is impossible or imposes an undue burden for them to solve it.

To benefit from this warranty it is necessary to show the proof of purchase with the date clearly visible, with no corrections or crossing out.

This document adds information, and never decreases the consumers' rights, which in all cases are protected by the Spanish law 'La Ley General para la Defensa de los Consumidores y Usuarios, Real Decreto Legislativo 1/2007 16 Noviembre.