

PUBLIC ADDRESS / ATTENUATORS / LOW IMPEDANCE

## **DOT-100M**

LOW IMPEDANCE MONO ATTENUATOR











For 4-8? low Z speakers



For universal standard case



6 position ergonomic potentiometer with switch off



ESPECIALLY RECOMMENDED IN:









Hospitality

Offices

Hotels

All sectors





## **DESCRIPTION**


Low impedance mono attenuator for flush or surface mounting. Minimalist aesthetics, with FONESTAR's own design, taking into account the needs of the market to make them go unnoticed in any installation, whether domestic or professional. Ergonomically designed 6-position potentiometer with switch-off, which allows for easy handling. Transformer attenuator for improved sound quality and precise volume control. Thanks to their standard dimensions, they can be fitted with universal square and round boxes for plasterboard partition walls (plasterboard). They can also be surface mounted in conjunction with the surface mounting boxes mod. DOT-BOX, available in black or white. The entire range is supplied in white, however, for installations requiring black attenuators, the black panel mod can be purchased separately. DOT-01N, easily interchangeable with white. Perfect for public address and voice evacuation systems, large and small shops, shopping centres, hotels, cafés, amusement arcades, home use, etc.


## **TECHNICAL CHARACTERISTICS**

FEATURES	Low impedance mono transformer attenuator for recessed or surface mounting.  The transformer provides better sound quality and volume control accuracy.
POWER	100 W maximum
OUTPUTS	Low Z for 4-8 Ohm speakers
CONTROLS	6 dimming positions and off switch
DIMENSIONS	Total: 83 x 83 x 50 mm depth Insert: 50 x 50 x 45 mm depth
WEIGHT	0.2 kg
	For standard universal square box, round for plasterboard partitions and for surface installation box mod. DOT-BOX.  Distance between screws: 60 mm

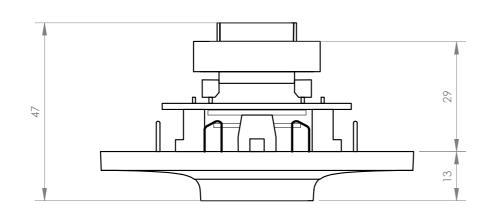

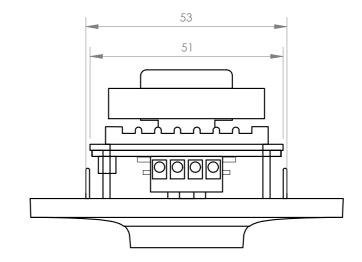

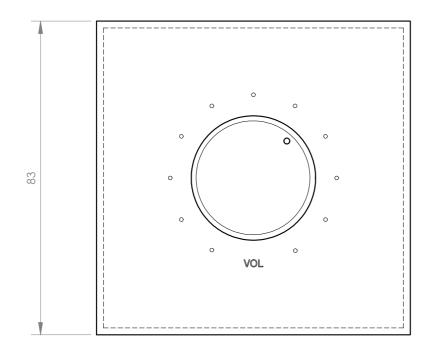



LOW IMPEDANCE MONO ATTENUATOR