


SYSTEMS AND CONTROL / ZONE SYSTEMS / ANALOGUE

ZS-11

10-300 ZONE SELECTOR MICROPHONE FOR ZONE SYSTEM MOD. ZSC-1110

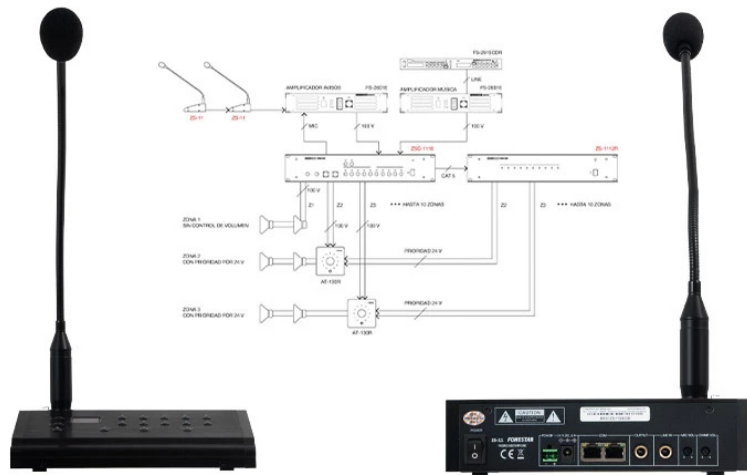

- ✓ Crystal clear voice pick-up
- ✓ 10 zone direct selection buttons
- ✓ Microphone volume and musical alert tone control

ESPECIALLY RECOMMENDED IN:



Education



Hotels




All sectors

DESCRIPTION

Paging microphone for the zone system mod. ZSC-1110.

TECHNICAL CHARACTERISTICS

FEATURES	Microphone with direct selection buttons of 10 zones. Selection of up to 300 zones. Selects the zone for paging on the ZSC-1110. Selects priority for 24V attenuators on the ZS-1112R. Microphone and musical alert tone volume control.
MICROPHONE	Electret condenser with gooseneck
INPUTS	1 balanced mic., XLR 600 Ohm 5 mV 1 unbalanced line, 6.3 mm jack 10,000 Ohm 775 mV 1 paging mic., RJ-45
OUTPUTS	1 unbalanced line, 6.3 mm jack 10,000 Ohm 775 mV 1 paging mic., RJ-45
CONNECTION	Cat 5e cable, RS-485 communication that can reach up to 1000 metres
POWER SUPPLY	24 V DC, 2 A with adapter included
DIMENSIONS	Microphone with gooseneck: 475 mm height Base: 220 x 52 x 143 mm depth
WEIGHT	1.5 kg
ACCESSORIES	Cat 5e connection cable, RJ45

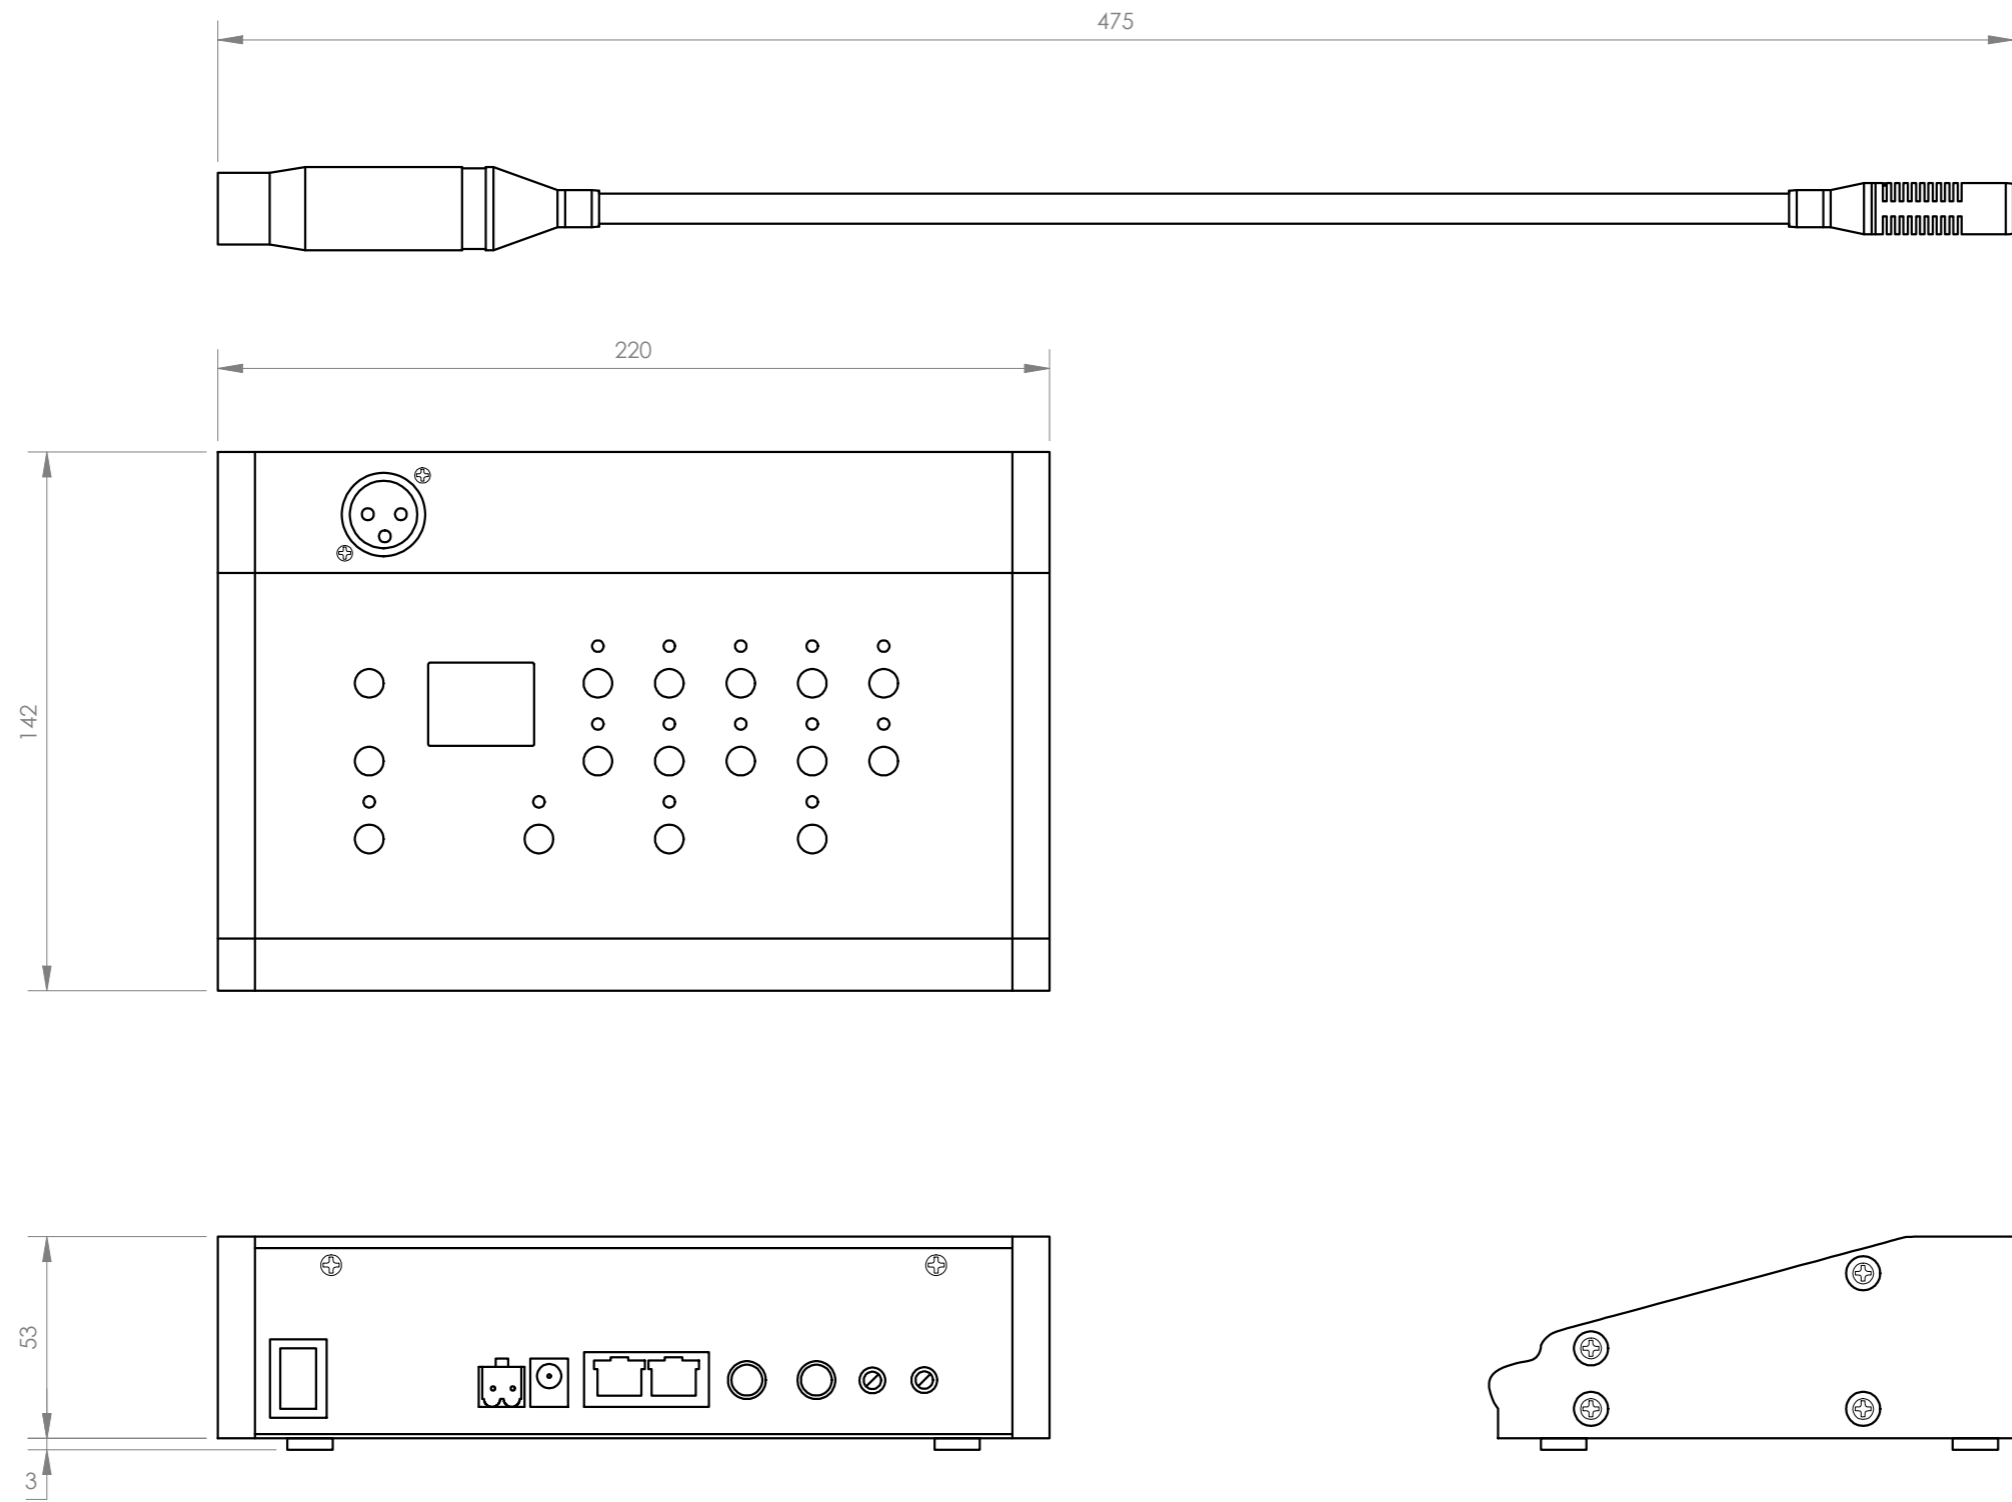

FONESTAR	Model	Description	Units	Scale
	ZS-11	10-300 ZONE SELECTOR MICROPHONE FOR ZONE SYSTEM	mm	1:2