

PUBLIC ADDRESS / SPEAKERS / SURFACE

SONORA-5TN

100 V LINE TRANSFORMER AND LOW IMPEDANCE SURFACE SPEAKER



- ✓ Crisp, distortion-free sound
- ✓ Excellent finish and elegant design
- ✓ IP-66 protection and salt fog
- ✓ Quick and easy installation

ESPECIALLY RECOMMENDED IN:



Hospitality



Education



Hotels



All sectors

DESCRIPTION


Sound reinforcement loudspeaker with 100 V line transformer and low impedance. Based on our extensive experience in the sound sector, FONESTAR has created SONORA. SONORA is a series of speakers specially designed for PA, musical and background sound applications. Its excellent finish and elegant design allow perfect integration in any space. They are fully prepared for outdoor use as they feature aluminium grille and protection against water (IP-66) and marine environments. Besides, SONORA delivers high sound quality with clear, distortion-free sound. They include all the necessary accessories for easy and quick installation: weatherproofed adjustable fixing mount, stainless steel screws and steel safety cable. For public address and ambient sound applications in public places such as restaurants, cafés, supermarkets, shopping centres, etc.

TECHNICAL CHARACTERISTICS

FEATURES	Low impedance loudspeaker with 100 V line transformer. Prepared for outdoor use, waterproof and rustproof materials.
POWER	80 W max., 40 W RMS
SPEAKERS	1 x 5 ¼" polypropylene woofer 1 x 1" tweeter
RESPONSE	80-20,000 Hz
IMPEDANCE	40 W RMS@100 V (250 Ohm) 20 W RMS@100 V (500 Ohm) 10 W RMS@100 V (1,000 Ohm) 5 W RMS@100 V (2,000 Ohm) Low Z: 8 Ohm
SENSITIVITY	88.3 dB @ 1 W/1 m
MAXIMUM SOUND PRESSURE	102.2 dB @ máx. W/1 m
COVERAGE ANGLE	H/V: 200°/200°@500Hz, 135°/135°@1kHz, 100°/120°@2kHz, 60°/80°@4kHz (-6 dB)
PROTECTIONS	IP-66 in compliance with EN 60529 IEC 60068-2-11 Environmental Test (Salt mist)
MATERIAL	ABS (UV resistance) Aluminium mesh grille, with powder-coated finish Weather-resistant mount Stainless steel screws
SWITCH	W selector in high Z and low Z

CONNECTORS	Euroblock in and out for cable 0.25 - 2.5 mm ² cross section
TEMPERATURE RANGE	-10°C ~ 60°C
COLOUR	Black (RAL 9005)
DIMENSIONS	Loudspeaker: 162 x 263 x 147 mm depth Mount wall plate: 68 x 110 mm Loudspeaker with mount: 216 mm depth
WEIGHT	2.2 kg
ACCESSORIES	Adjustable mounting bracket ± 60° in all directions. Steel safety cable


SPL vs Frequency

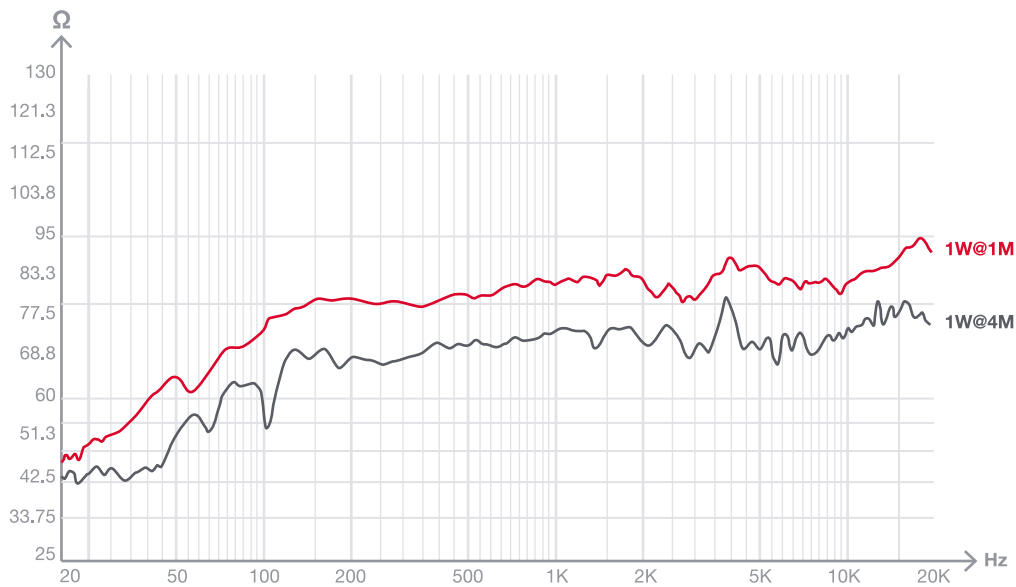


SPL vs Angle

dBSPL

100
95
90
85
80
75
70
65
60
55
50
45
40
-180
45
50
55
60
65
70
75
-150
80
85
90
95
100

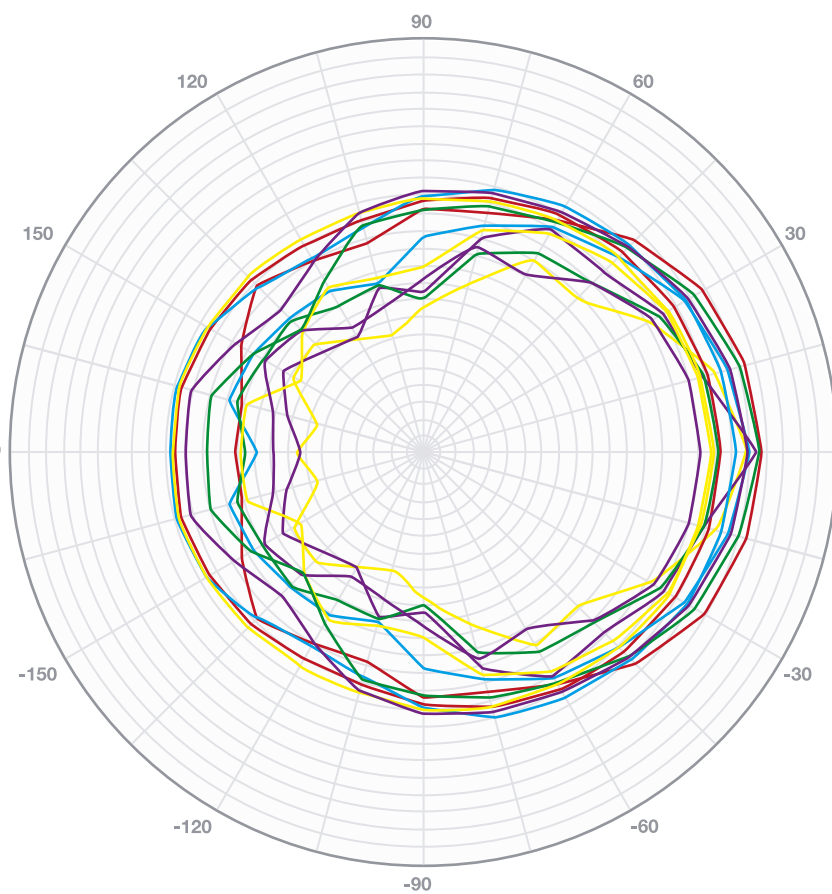

Curve	Freq.	BW	Q	DI
—	441.94	360	1	0.0
—	625.00	150	2.4	3.8
—	883.88	150	2.4	3.8
—	1.25K	90	4.0	6.0
—	1.77K	60	6.0	7.8
—	2.50K	120	3.0	4.8
—	3.54K	90	4.0	6.0
—	5.00K	60	6.0	7.8
—	7.07K	90	4.0	6.0
—	10.00K	60	6.0	7.8
—	14.14K	30	12.0	10.8
—	20.00K	1	360.0	25.6
—	28.28K	1	360.0	25.6
—	40.00K	1	360.0	25.6

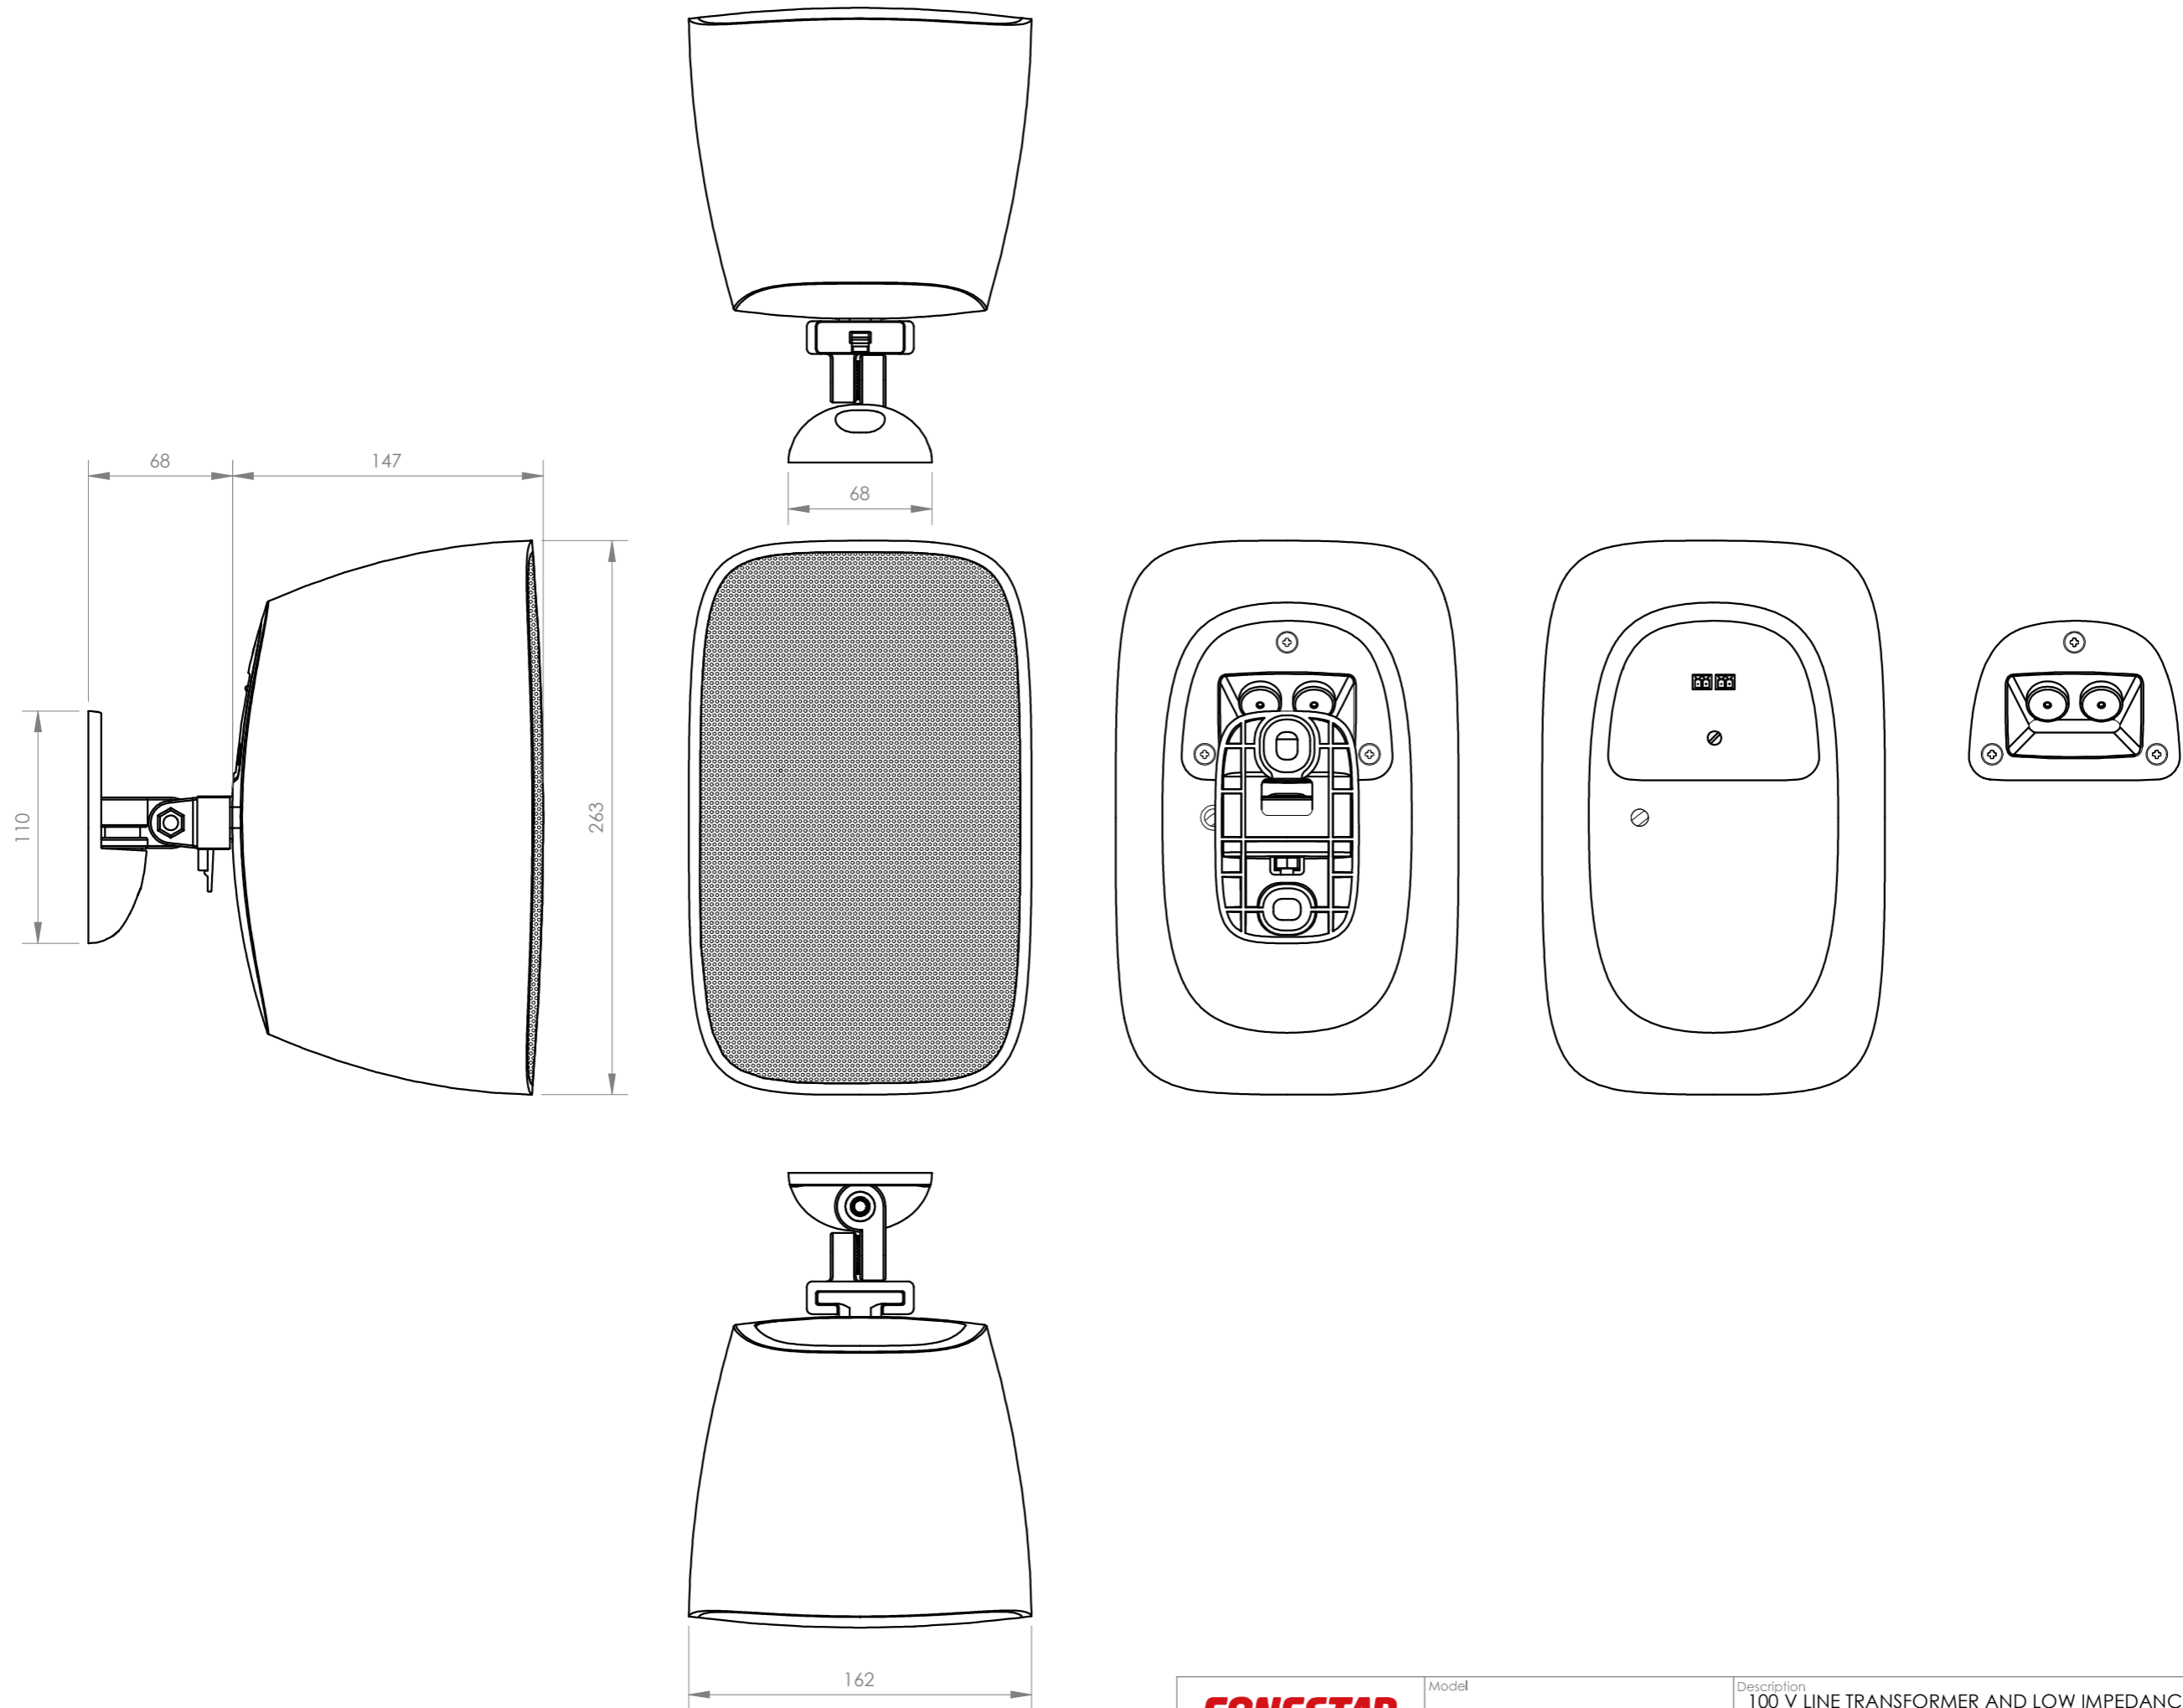

FONESTAR	Model	Description	Units	Scale
	SONORA-5TB+SONORA-5TN	100 V LINE TRANSFORMER AND LOW IMPEDANCE SURFACE SPEAKER	mm	1:3